


Amendment July 5, 2006
Serial No.: 10/788,457

Our File: APV31681

ATTACHMENT I - EP 1 454 563 B1



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 1 454 563 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
31.05.2006 Bulletin 2006/22

(51) Int Cl.:
A47B 9/00 (2006.01) A47B 9/18 (2006.01)

(21) Application number: **04100831.9**

(22) Date of filing: **02.03.2004**

(54) **Table with variable configuration**

Tisch mit veränderlicher Zusammenstellung

Table à configurations variables

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IT LI LU MC NL PL PT RO SE SI SK TR**

(30) Priority: **03.03.2003 IT UD20030049**

(43) Date of publication of application:
08.09.2004 Bulletin 2004/37

(73) Proprietor: **F & F srl
33082 Azzano Decimo PN (IT)**

(72) Inventors:
• **Eusebi, Publio
00149 Roma (IT)**
• **Padovan, Alfio
33082 Azzano Decimo (PN) (IT)**

(74) Representative: **Petrz, Gilberto Luigi et al
GLP S.r.l.
Piazzale Cavedalis 6/2
33100 Udine (IT)**

(56) References cited:
GB-A- 285 557 US-A- 6 003 450

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 1 454 563 B1

Description

FIELD OF THE INVENTION

[0001] The present invention concerns a table with variable configuration, able to be used both as a sitting-room table and also as a dining table or work-table.

BACKGROUND OF THE INVENTION

[0002] Various types of tables with variable configuration are known, in which it is possible to vary the amplitude and/or height from the floor of the supporting plane so as to allow its use for different purposes.

[0003] Some of these tables include a plane folding like a book, associated with movement means in the form of crossed arms or a pantograph, which allow to take the plane from a lowered position to a raised position, and vice versa.

[0004] The plane can be made to slide laterally with respect to the movement means, or to the frame on which the latter are mounted, and then opened in order to substantially double its amplitude.

[0005] Other tables provide lifting means with a crank, a piston or suchlike.

[0006] However, in known solutions the possible configurations of the table are substantially limited to a first condition, wherein the plane is lowered and folded, and a second condition wherein the plane is raised and possibly open.

[0007] Moreover, as it passes from the lowered position to the raised position, the plane is kept in axis with respect to the lifting means, or the frame, so that in order to extend it there is the necessary firstly to translate it laterally, making it slide on appropriate guides, and then open it.

[0008] From US-A-6,003,450 it is also known a lift apparatus which includes a folding frame assembly and a pair of support members which are connected to the folding frame assembly by a linkage. The lift apparatus is mounted on a table base and is capable of an open position in which a single foldable table top is lifted to a height appropriate for a dining table. In the open position the support members are able to support a hinged leaf of the foldable table top which, by folding, increases the size of the table top. However, this known lift apparatus has the disadvantage that the support members and the kind of linkage associated thereto do not guarantee a stable position of the hinged leaf in the open position, so rendering very unstable the entire table top.

[0009] The present invention has set itself the purpose of making a table with variable configuration which is simple to construct and versatile and reliable in use.

[0010] Another purpose of the invention is to make a table with variable configuration wherein the relative plane can be raised and lowered easily and extended without the need for the user to make it slide laterally.

[0011] The Applicants have devised, tested and embodied

the present invention in order to overcome the shortcomings of the state of the art, to achieve the purposes mentioned above and to obtain other advantages.

BACKGROUND OF THE INVENTION

[0012] The present invention is set forth and characterized essentially in the main claim, while the dependent claims describe other innovative characteristics of the invention.

[0013] The table according to the present invention comprises a supporting frame, able to rest on the floor, a main plane, a service plane and a movement assembly associated with the frame and able to move both the main plane and the service plane from a lowered position to a raised position and vice versa.

[0014] To be more exact, the movement assembly comprises two mechanisms: a first mechanism able to cause the lifting and lowering of the main plane, and a second mechanism able to move the service plane below the main plane in the lowered position and to its side in the raised position.

[0015] In their raised position, the main plane and the service plane are arranged off-center with respect to the frame.

[0016] According to one aspect of the invention, such two mechanisms are connected to each other by means of at least a rod able to cause the second mechanism to be driven simultaneously to the drive of the first mechanism, so that the lifting and lowering of the main plane causes a corresponding lifting and lowering of the service plane.

[0017] In a preferential form of embodiment, each mechanism comprises at least a pair of oscillating arms, parallel to each other, pivoted at a first point to the frame and at a second point to relative connection means with the respective planes.

[0018] According to a variant, each mechanism comprises two pairs of oscillating arms; in this embodiment the arms of the second mechanism are arranged in the space defined between the arms of the first mechanism.

[0019] According to another variant, at least the first mechanism is connected to the frame by means of elastic thrust and return means, which encourage the lifting and lowering of the main plane and the service plane, considerably reducing the efforts required by the user.

[0020] In a preferential form of embodiment, the main plane is divided into two substantially equal parts, first and second, hinged to and superimposed one above the other.

[0021] To be more exact, in its lowered position the main plane has the first part folded over the second part; in the raised position, on the contrary, the main plane can be used either keeping the two parts superimposed one above the other, or by overturning the first part to rest on the service plane, so that it is arranged adjacent and co-planar to the second part.

[0022] The extension of the main plane, which sub-

stantially allows to double its usable supporting surface, is then achieved simply by overturning the first part, without needing to translate the main plane laterally, since the latter is already off-center with respect to the frame.

[0023] The table according to the invention can therefore be used in three different configurations: a first configuration with main plane lowered and service plane retracted below it; a second configuration with main plane and service plane raised and adjacent to each other; and a third configuration with main plane raised and extended.

BRIEF DESCRIPTION OF THE DRAWINGS

[0024] These and other characteristics of the present invention will be apparent from the following description of a preferential form of embodiment, given as a non-restrictive example, with reference to the attached drawings wherein:

- fig. 1 is a front view, partly in section, of a table according to the invention in a first configuration of use;
- fig. 2 shows the table in fig. 1 in the process of being lifted;
- fig. 3 shows the table in fig. 1 in a second configuration of use;
- fig. 4 shows the table in fig. 1 in a third configuration of use;
- fig. 5 is a partly sectioned lateral view of the table in fig. 4.

DESCRIPTION OF A PREFERENTIAL FORM OF EMBODIMENT OF THE INVENTION

[0025] With reference to the attached drawings, the number 10 denotes in its entirety the table with variable configuration according to the present invention.

[0026] The table 10 comprises a frame 11 on which a movement assembly 12 is mounted, able to move a main plane 13 and a service plane 14 from a lowered position to a raised position and vice versa.

[0027] In this case, the frame 11 has four legs 15 resting on the floor 16, which support a box-like structure 17 open at the top.

[0028] Inside the box-like structure 17 there is a container 29 for objects.

[0029] The main plane 13 is of the extendable type and is made of two parts, first 13a and second 13b, hinged together and superimposed.

[0030] To be more exact, when the main plane 13 is extended normally (fig. 1), the first part 13a is above the second part 13b while, in the extended condition of the main plane 13 (fig. 4) the first part 13a is arranged adjacent and co-planar to the second part 13b.

[0031] The service plane 14 is of smaller size than one part 13a, 13b of the main plane 13 and is able to be arranged retracted below the latter in its lowered position.

[0032] The movement assembly 12 comprises two

mechanisms with oscillating arms, first 18 and second 19, able respectively to allow the movement of the main plane 13 and the service plane 14.

[0033] The first mechanism 18 comprises two pairs of arms each consisting of an inner arm 20 and an outer arm 21, parallel to each other.

[0034] Similarly, the second mechanism 19 comprises two pairs of arms each consisting of an inner arm 22 and an outer arm 23, parallel to each other.

[0035] The arms 22 and 23 of the second mechanism 19 are arranged in the space between the arms 20 and 21 of the first mechanism 18.

[0036] The outer arms 21 of the first mechanism 18 are pivoted at the lower end 21a to the box-like structure 17, and at the upper end 21b to a relative bracket 24, which is solid with a plate 25 fixed below the second part 13b of the main plane 13.

[0037] The inner arms 20 of the first mechanism 18 are pivoted at the lower end 20a to one end of respective connection rods 27, whose other end is pivoted at an intermediate point 22c of the inner arms 22 of the second mechanism 19. The inner arms 20 also have the upper end 20b pivoted to the relative bracket 24 and are pivoted at an intermediate point 20c to the sides of the box-like structure 17.

[0038] A spring 28 connects the lower end 20a of each inner arm 20 to a peripheral point of the box-like structure 17.

[0039] The arms 22 and 23 of the second mechanism 19 are pivoted respectively with the lower ends 22a and 23a to the box-like structure 17 and with the upper ends 22b and 23b to a relative bracket 26 fixed below the service plane 14.

[0040] In a first configuration, shown in fig. 1, the table 10 has the main plane 13 folded back and in the lowered position resting on the box-like structure 17, so as to be used as a sitting room table.

[0041] In this condition, the arms 20, 21, 22, 23 of the mechanisms 18 and 19 are folded back one towards the other inside the box-like structure 17, where the service plane 14 is also housed in a retracted position.

[0042] The table 10 can also assume a second configuration that allows to use both the main plane 13 and also the service plane 14.

[0043] To take the table 10 from the first to the second configuration it is sufficient to grip the main plane 13 and lift it; in this way the arms 20 and 21 of the first mechanism 18 move progressively from the initial folded position to a substantially erect position slightly inclined outwards.

[0044] The movement of the inner arm 20 of the first mechanism 18 causes the rod 27 to thrust the inner arm 22 of the second mechanism 19, which also moves to an erect position drawing the mating outer arm 23 and thus causing the service plane 14 to be lifted (fig. 2).

[0045] In this step, after an initial resistance that allows the main plane 13 to keep stably resting on the box-like structure 17, in its lowered position, the spring 28 gives the inner arm 20 a thrust which encourages the lifting of

the main plane 13, so as to considerably reduce the effort which the user has to exert.

[0046] Once the completely raised position has been reached (fig. 3), the main plane 13 and the service plane 14 are arranged one adjacent to the other, with the upper surface of the service plane 14 substantially co-planar to the lower surface of the second part 13b of the main plane 13.

[0047] In this condition the service plane 14 can be used as a supplementary resting plane for objects such as bottles, plates or other, which otherwise would occupy space on the main plane 13.

[0048] In such second configuration, the structure of the mechanisms 18 and 19 guarantees an effective transmission to the frame 11 of the loads weighing on the planes 13, 14, so that it is possible to use even only one of the planes 13, 14 without compromising the stability of the table 10.

[0049] Should it be necessary to arrange a bigger supporting plane, the table 10 can assume a third configuration, simply by overturning the first part 13a of the main plane 13 so as to make it rest on the service plane 14 in a position adjacent and co-planar to the second part 13b (fig. 4).

[0050] It is clear that modifications and/or additions of parts can be made to the table 10 as described heretofore, without departing from the field and scope of the present invention.

[0051] For example, the frame 11 could be made differently from the way shown here.

[0052] Or the mechanisms 18 and 19 could consist of a single pair of parallel arms arranged in a centered position with respect to the frame 11.

[0053] It is also clear that, although the present invention has been described with reference to specific examples, a person of skill in the art shall certainly be able to achieve many other equivalent forms of a table with variable configuration, all of which shall come within the field and scope of the attached claims.

Claims

1. Table with variable configuration comprising at least a frame (11) to support a main plane (13) and an assembly, associated with said frame (11) and able to move said main plane (13) from a lowered position to a raised position and vice versa, wherein said assembly (12) comprises a first mechanism (18) and a second mechanism (19), and wherein said first mechanism (18) is connected to said main plane (13) to selectively lift or lower said main plane (13), **characterized in that** said second mechanism (19) is connected to a service plane (14), substantially parallel to said main plane (13) to normally take said service plane (14) below said main plane (13) in said lowered position and substantially adjacent to said main plane (13) in said raised position.
2. Table as in claim 1, **characterized in that** said first and second mechanisms (18, 19) are connected to each other by means of at least a connection element (27) able to effect the drive of said second mechanism (19) simultaneously to the drive of said first mechanism (18), so that the lifting and lowering of said service plane (14) occurs in coordination with the lifting and lowering of said main plane (13).
3. Table as in claim 1 or 2, **characterized in that** each of said first and second mechanisms (18, 19) comprises at least a pair of oscillating arms (20, 21; 22, 23) parallel to each other, each of said arms (20, 21, 22, 23) being pivoted at a first point (20c, 21a, 22a, 23a) to said frame (11) and at a second point (20b, 21b, 22b, 23b) to relative means (24, 26) of connection with said planes (13, 14).
4. Table as in claim 3, **characterized in that** each of said mechanisms (18, 19) comprises two pairs of said arms (20, 21; 22, 23), the arms (22, 23) of said second mechanism (19) being arranged in the space defined between the arms (20, 21) of said first mechanism (18).
5. Table as in claims 2 and 3, **characterized in that** said connection element comprises a stiff rod (27), associated both to one end (20a) of an arm (20) of said first mechanism (18) and also to an intermediate point (22c) of an arm (22) of said second mechanism (19).
6. Table as in any claim hereinbefore, **characterized in that** at least said first mechanism (18) is connected to said frame (11) by means of elastic thrust and return means (28) able to encourage the lifting and lowering of said main plane (13).
7. Table as in claims 3 and 6, **characterized in that** said elastic means comprise at least a spring (28) constrained to one end (20a) of an arm (20) of said first mechanism (18).
8. Table as in any claim hereinbefore, **characterized in that**, in said raised position, said main plane (13) and said service plane (14) are arranged off-center with respect to said frame (11).
9. Table as in any claim hereinbefore, **characterized in that** said main plane (13) is divided into two parts, first (13a) and second (13b), said first part (13a) being hinged to and superimposed above said second part (13b).
10. Table as in claim 9, **characterized in that**, in said raised position, said first part (13a) is able to be rested on said service plane (14) in order to be arranged adjacent and co-planar to said second part (13b).

11. Table as in any claim hereinbefore, **characterized in that** said frame (11) comprises a box-like structure (17) inside which said mechanisms (18, 19) and said service plane (14) are able to be accommodated in said lowered position.
12. Table as in claim 11, **characterized in that** inside said box-like structure (17) a compartment (29) is made to contain objects.

Patentansprüche

1. Tisch mit einer variablen Konfiguration mit wenigstens einem Rahmen (11) zum Tragen einer Hauptplatte (13) und mit einer Anordnung, die mit dem Rahmen (11) verbunden und zum Bewegen der Hauptplatte (13) von einer abgesenkten Stellung in eine angehobene Stellung und umgekehrt bewegbar ist, wobei die Anordnung (12) über einen ersten Mechanismus (18) und über einen zweiten Mechanismus (19) verfügt und wobei der erste Mechanismus (18) mit der Hauptplatte (13) verbunden ist, um die Hauptplatte (13) selektiv zu heben oder abzusenken, **dadurch gekennzeichnet, dass** der zweite Mechanismus (19) mit einer Zusatzplatte (14) verbunden ist, die im Wesentlichen parallel zu der Hauptplatte (13) angeordnet ist, um die Zusatzplatte (14) üblicherweise in der abgesenkten Stellung unterhalb der Hauptplatte (13) und in der angehobenen Stellung im Wesentlichen benachbart der Hauptplatte (13) anzuordnen.
2. Tisch nach Anspruch 1, **dadurch gekennzeichnet, dass** der erste Mechanismus und der zweite Mechanismus (18, 19) über wenigstens ein Verbindungselement (27) miteinander verbunden sind, das dazu eingerichtet ist, den Antrieb des zweiten Mechanismus (19) gleichzeitig mit dem Antrieb des ersten Mechanismus (18) bereitzustellen, so dass das Heben und Absenken der Zusatzplatte (14) koordiniert mit dem Heben und Absenken der Hauptplatte (13) erfolgt.
3. Tisch nach Anspruch 1 oder 2, **dadurch gekennzeichnet, dass** sowohl der erste Mechanismus als auch der zweite Mechanismus (18, 19) über wenigstens ein Paar von parallel zu einander angeordneten, hin- und herbewegbaren Armen (20, 21; 22, 23) verfügen, wobei jeder der Arme (20, 21, 22, 23) an einem ersten Punkt (20c, 21a, 22a, 23a) schwenkbar zu dem Rahmen (11) und an einem zweiten Punkt (20b, 21b, 22b, 23b) schwenkbar zu zugehörigen Verbindungsmitteln (24, 26) an den Platten (13, 14) gelagert ist.
4. Tisch nach Anspruch 3, **dadurch gekennzeichnet, dass** jeder Mechanismus (18, 19) zwei Paare von Armen (20, 21; 22, 23) aufweist, wobei die Arme (22, 23) des zweiten Mechanismus (19) in dem zwischen den Armen (20, 21) des ersten Mechanismus (18) ausgebildeten Zwischenraum angeordnet sind.
5. Tisch nach Anspruch 2 und 3, **dadurch gekennzeichnet, dass** das Verbindungselement eine steife Stange (27) aufweist, die an einem Ende (20a) eines Armes (20) des ersten Mechanismus (18) sowie an einem Zwischenpunkt (22c) eines Armes (22) des zweiten Mechanismus (19) angebracht ist.
6. Tisch nach einem der vorangehenden Ansprüche, **dadurch gekennzeichnet, dass** wenigstens der erste Mechanismus (18) mittels elastischer Schub- und Rückzugsmittel (28) mit dem Rahmen (11) verbunden ist, die dazu eingerichtet sind, das Heben und Absenken der Hauptplatte (13) zu bewerkstelligen.
7. Tisch nach Anspruch 3 und 6, **dadurch gekennzeichnet, dass** die elastischen Mittel wenigstens eine Feder (28) aufweisen, die an einem Ende (20a) eines Armes (20) des ersten Mechanismus (18) angebracht ist.
8. Tisch nach einem der vorangehenden Ansprüche, **dadurch gekennzeichnet, dass** in der angehobenen Stellung die Hauptplatte (13) und die Zusatzplatte (14) in Bezug auf den Rahmen (11) außermittig angeordnet sind.
9. Tisch nach einem der vorangehenden Ansprüche, **dadurch gekennzeichnet, dass** die Hauptplatte (13) in zwei Teile unterteilt ist, nämlich in einen ersten Teil (13a) und in einen zweiten Teil (13b), wobei der erste Teil (13a) gelenkig mit dem zweiten Teil (13b) verbunden und oberhalb von diesem angeordnet ist.
10. Tisch nach Anspruch 9, **dadurch gekennzeichnet, dass** in der angehobenen Stellung der erste Teil (13a) dazu eingerichtet ist, auf der Zusatzplatte (14) zu liegen, um in einer benachbarten und koplanaren Anordnung zu dem zweiten Teil (13b) zu sein.
11. Tisch nach einem der vorangehenden Ansprüche, **dadurch gekennzeichnet, dass** der Rahmen (11) eine schachtelartige Struktur (17) aufweist, innerhalb der die Mechanismen (18, 19) und die Zusatzplatte (14) aufnehmbar sind.
12. Tisch nach Anspruch 11, **dadurch gekennzeichnet, dass** innerhalb der schachtelartigen Struktur (17) zur Aufnahme der Objekte eine Abteilung (29) eingerichtet ist.

Revendications

1. Table à configuration variable comprenant au moins un bâti (11) de support d'un plan principal (13), et une structure associée audit bâti (11) et apte à déplacer ledit plan (13) d'une position abaissée à une position relevée et vice versa, dans laquelle ladite structure (12) comprend un premier mécanisme (18) et un second mécanisme (19), et dans laquelle ledit premier mécanisme (18) est assemblé audit plan principal (13) pour relever ou abaisser sélectivement ledit plan principal (13), **caractérisée en ce que** ledit second mécanisme (19) est assemblé à un plan de service (14), sensiblement parallèle audit plan principal (13) afin d'amener normalement ledit plan de service (14) en dessous dudit plan principal (13) dans ladite position abaissée, et sensiblement adjacent audit plan principal (13) dans ladite position relevée.
2. Table selon la revendication 1, **caractérisée en ce que** lesdits premier et second mécanismes (18, 19) sont assemblés l'un à l'autre par l'intermédiaire d'au moins un élément d'assemblage (27) capable d'entraîner simultanément ledit second mécanisme (19) et ledit premier mécanisme (18), de sorte que le levage et l'abaissement dudit plan de service (14) interviennent en coordination avec le levage et l'abaissement dudit plan principal (13).
3. Table selon la revendication 1 ou 2, **caractérisée en ce que** chacun desdits premier et second mécanismes (18, 19) comprend au moins une paire de bras oscillants (20, 21 ; 22, 23) parallèles entre eux, chacun desdits bras (20, 21, 22, 23) pouvant pivoter en un premier point (20c, 21 a, 22a, 23 a) par rapport audit bâti (11) et en un second point (20b, 21b, 22b, 23b) par rapport à des moyens correspondants (24, 26) d'assemblage auxdits plans (13, 14).
4. Table selon la revendication 3, **caractérisée en ce que** chacun desdits mécanismes (18, 19) comprend deux paires desdits bras (20, 21 ; 22, 23), les bras (22, 23) dudit second mécanisme (19) étant installés dans l'espace défini entre les bras (20, 21) dudit premier mécanisme (18).
5. Table selon les revendications 2 et 3, **caractérisée en ce que** ledit élément d'assemblage comprend une baguette rigide (27), associée à la fois à une extrémité (20a) d'un bras (20) dudit premier mécanisme (18) et à un point intermédiaire (22c) d'un bras (22) dudit second mécanisme (19).
6. Table selon l'une quelconque des revendications ci-dessus, **caractérisée en ce qu'**au moins ledit premier mécanisme (18) est assemblé audit bâti (11) par l'intermédiaire d'une poussée élastique et de moyens de rappel (28) aptes à favoriser le levage et l'abaissement dudit plan principal (13).
7. Table selon les revendications 3 et 6, **caractérisée en ce que** lesdits moyens élastiques comprennent au moins un ressort (28) contraint à une extrémité (20a) d'un bras (20) dudit premier mécanisme (18).
8. Table selon l'une quelconque des revendications ci-dessus, **caractérisée en ce que**, dans ladite position relevée, ledit plan principal (13) et ledit plan de service (14) se trouvent placés en décalage par rapport audit bâti (11).
9. Table selon l'une quelconque des revendications ci-dessus, **caractérisée en ce que** ledit plan principal (13) est divisé en deux parties, une première (13a) et une seconde (13b), ladite première partie (13a) étant articulée et superposée sur ladite seconde partie (13b).
10. Table selon la revendication 9, **caractérisée en ce que**, dans ladite position relevée, ladite première partie (13a) peut reposer sur ledit plan de service (14) afin de se trouver adjacente à ladite seconde partie (13b) et sur le même plan que celle-ci.
11. Table selon l'une quelconque des revendications ci-dessus, **caractérisée en ce que** ledit bâti (11) comprend une structure en forme de caisson (17) à l'intérieur de laquelle peuvent se loger lesdits mécanismes (18, 19) et ledit plan de service (14) dans ladite position abaissée.
12. Table selon la revendication 11, **caractérisée en ce qu'**à l'intérieur de ladite structure en forme de caisson (17) est ménagé un compartiment (29) destiné à contenir des objets.

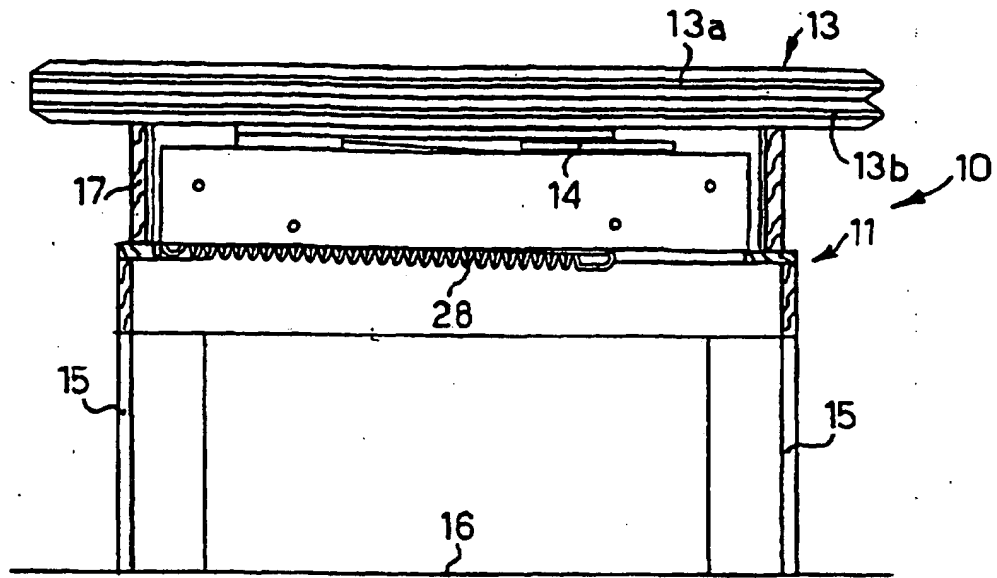


fig. 1

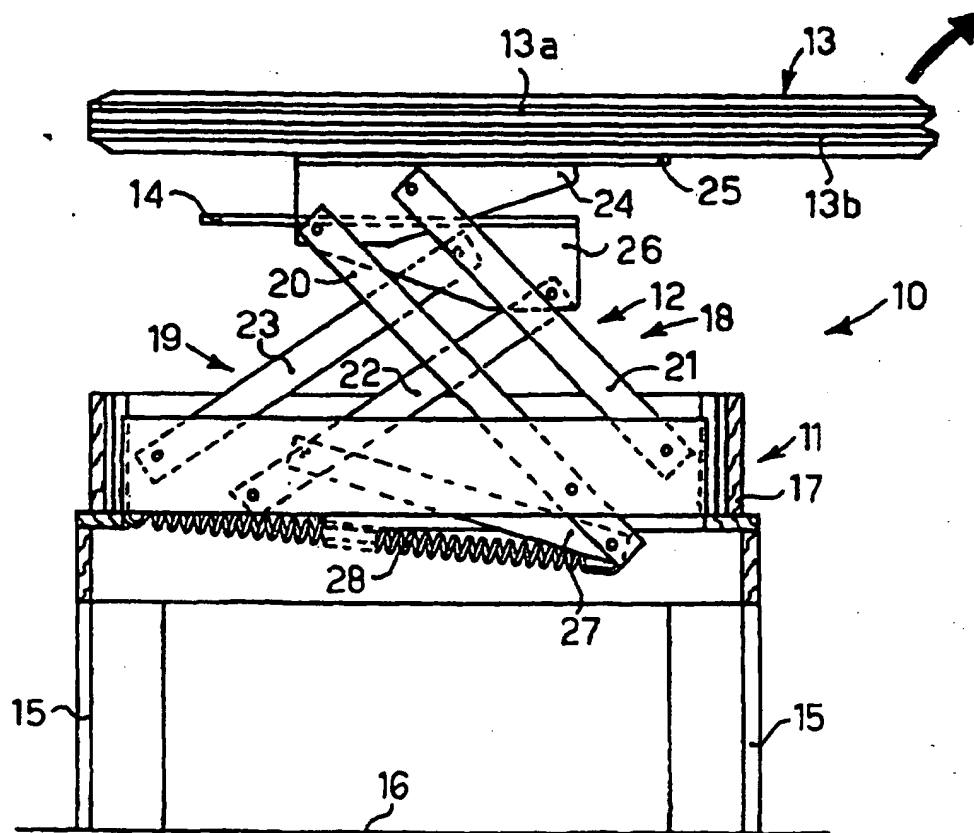


fig. 2

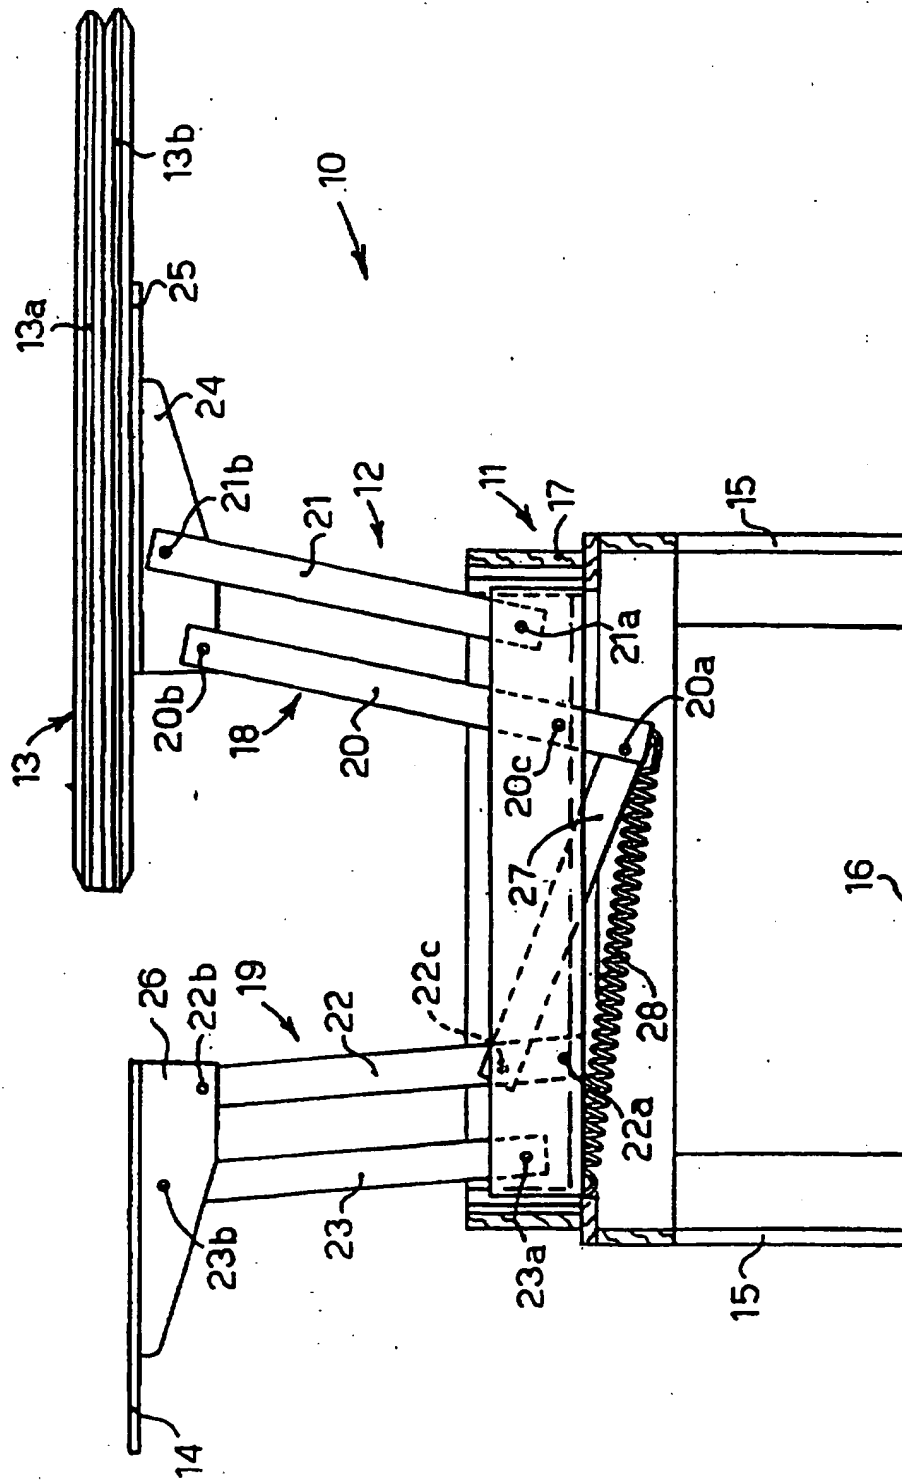


fig. 3

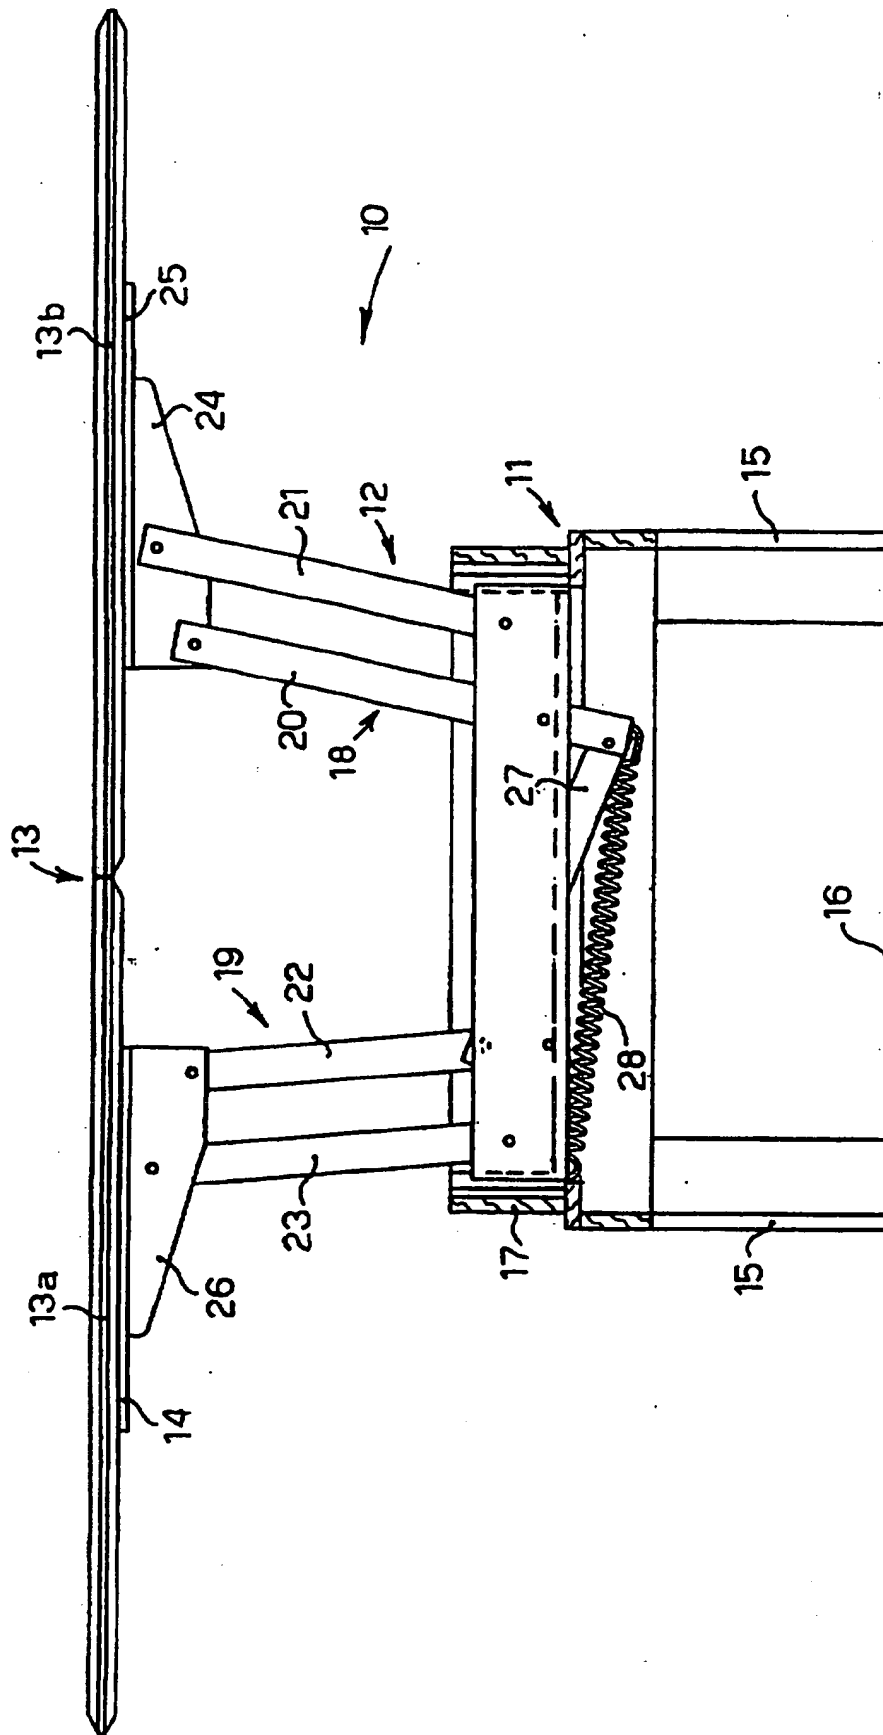


fig. 4

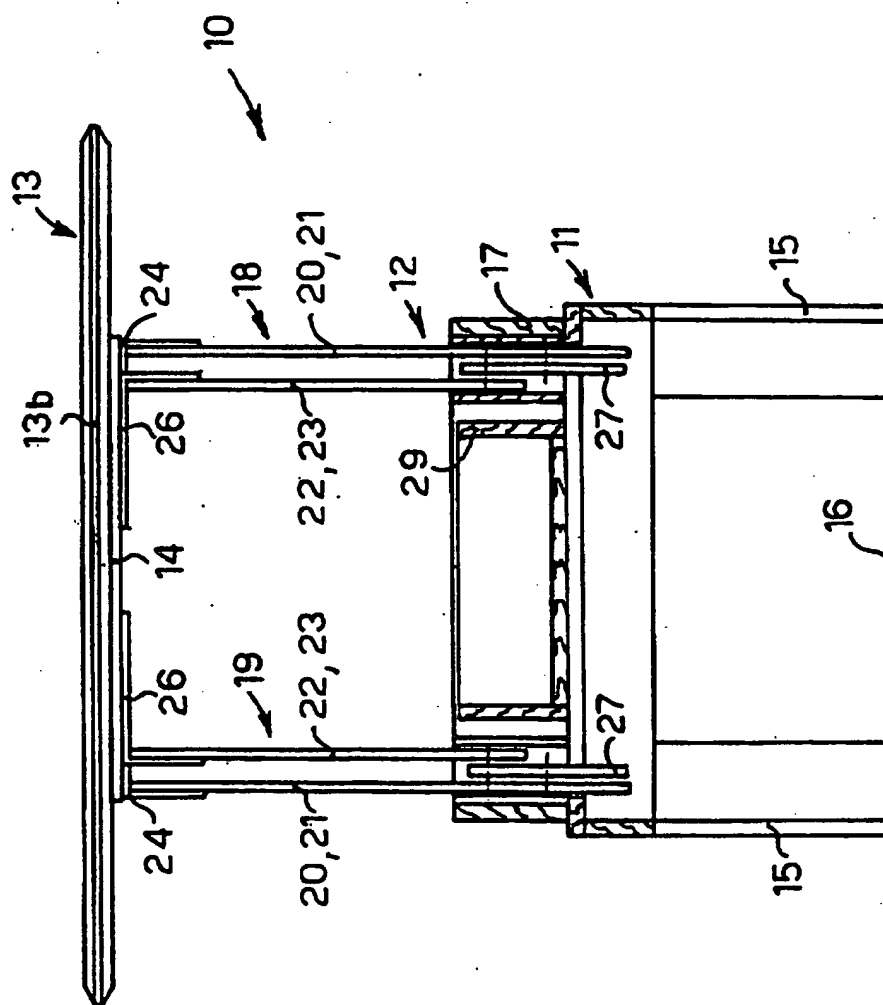


fig. 5